



CERTIFIED PORCELAIN TILE

SUNSET FALLS™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAIC WITH REVEAL IMAGING®

FLOOR & WALL



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

SUNSET FALLS™

Invite the calming effects of the sun setting over the water into your design. With a natural travertine stone-look and gentle linear grain, Sunset Falls provides classic style in timeless tones. Rectangular shapes in several sizes and a herringbone mosaic offer plenty of flexibility for foundational neutrality or a monochromatic vibe.



Cover photo features Sunset Falls White 12 x 24 on the floor and Bricktown™ Arctic Bend 4 x 8 on the wall.
Above photo features Sunset Falls Gray 12 x 24 on the floor, Gray 4 x 12 on the shower walls with Gray Jolly trim and White 1 x 3 Herringbone mosaic on the shower floor and backsplash.

SUNSET FALLS™

GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAIC
WITH REVEAL IMAGING®

GLAZED PORCELAIN FLOOR TILE



WHITE SF15



BEIGE SF16




GRAY SF17

GLAZED CERAMIC WALL TILE



WHITE SF15

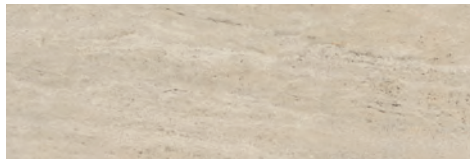

BEIGE SF16



GRAY SF17

GLAZED CERAMIC MOSAIC



WHITE SF15



BEIGE SF16



GRAY SF17

JOLLY TRIM



WHITE SF15



BEIGE SF16













GRAY SF17

SUNSET FALLS™



GLAZED PORCELAIN FLOOR AND GLAZED CERAMIC WALL & MOSAIC WITH REVEAL IMAGING®

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	12 x 24 Floor Tile	11-13/16" x 23-13/16" (30.00 cm x 60.48 cm)	5/16"	17.37	9
	6 x 18 Wall Tile 	6" x 18" (15.25 cm x 45.76 cm)	3/8"	11.25	15
	4 x 12 Wall Tile 	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"	10.64	28
	1 x 3 Herringbone Mosaic  	9" x 12" Sheet (22.86 cm x 30.48 cm Sheet)	1/4"	6.00	10

 Ceramic body
 Dot-mounted

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 24	P-43F9	10
	Jolly	1/2 x 12	S1/212J	4 PCS/CARD

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

Floor: 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)

Wall: (6 x 18) 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)

(4 x 12) 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)

Mosaic: 1/8"

RELATIVE PRICING: Medium

SHADE VARIATION



HIGH
(V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	WALL RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 20.0%	< 3.0%
Breaking Strength	C648	> 275 lbs.	120-230 lbs.	> 250 lbs.
Scratch Hardness	MOHS	8.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant
Abrasion Resistance	C1027	3	N/A	3

For additional information on test results, visit us at: americanolean.com/information/TestResults.

USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●*
Wet & Level – Interior Floor	≥ 0.42	●*
Shower Floors (Residential or Light Commercial)	≥ 0.42	●**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●*
Pool Linings	N/A	●**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

Wall and mosaic tile suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

* Wall tile not suitable for this application.

** Mosaic tile only

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit americanolean.com.



POST-CONSUMER
RECYCLED MATERIALS



REVEAL IMAGING®



PRE-CONSUMER
RECYCLED MATERIALS



MADE IN THE U.S.A.

All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2019 AMERICAN OLEAN (02/19)



AMERICAN OLEAN®
PROVEN IN TILE™