

# SABBIA MARMO™

COLORBODY™ PORCELAIN FLOOR & MOSAIC WITH  
STEPWISE™ TECHNOLOGY

FLOOR | MOSAIC

**MARAZZI** 

DARE TO BE BOLD™

STONE LOOK



# SABBIA MARMO™

Sabbia Marmo™ captivates any space with its subtle, yet elegant sand-like visuals. Inspired by natural stone, matte finish colors available in White, Medium Gray, Dark Gray, and Black give a modern take on traditional stone and are available in three distinct sizes — 12x24, 24x24, and 24x48, plus an eye-catching linear strip mosaic. Features StepWise™ technology for superior slip resistance in both residential and commercial spaces. Create daring looks to express your unique style.



STEPWISE™

**50% MORE**  
**SLIP RESISTANT**  
**THAN ORDINARY TILE†**

†When compared to tile meeting ANSI Standards



COVER AND ABOVE PHOTO: SABBIA MARMO™  
BLACK AND COASTAL EFFECTS™ ONYX TRELLIS

STONE LOOK



# SABBIA MARMO™

COLORBODY™ PORCELAIN FLOOR & MOSAIC WITH STEPWISE™ TECHNOLOGY  
 FLOOR | MOSAIC FINISHES: MATTE

# MARAZZI®

DARE TO BE BOLD™

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



STONE LOOK

FLOOR TILE



SB40 White



SB41 Medium Gray



SB42 Dark Gray



SB43 Black


LINEAR STRIP MOSAIC  
 12 x 24 SHEET




SB40 White



SB41 Medium Gray

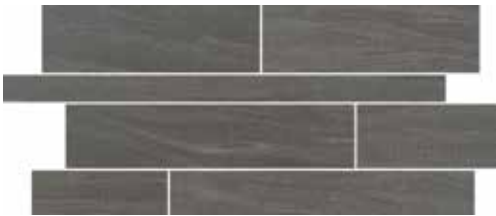

SB42 Dark Gray

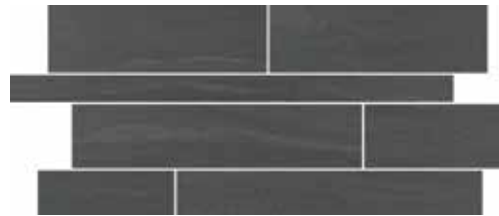

SB43 Black

50% MORE SLIP RESISTANT THAN ORDINARY TILE\*



VISIT MARAZZITILE.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

\*When compared to tile meeting ANSI Standards

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



STONE LOOK

## SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"	15.12	8
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	15.20	4
	24 x 48 Floor Tile	23-3/8" x 46-15/16" (59.44 cm x 119.30 cm)	3/8"	15.26	2
	Linear Strip Mosaic*	11-5/8" x 26-1/4" Sheet (29.54 cm x 66.68 cm Sheet)	5/16"	7.60	4

\*Mesh-mounted

## TRIM

Description	Number	Size	Shape
Floor Bullnose	P43F9	3 x 24	
Cove Base	P36C9TB	6 x 12	
Cove Base Outcorner	PC36C9TB	6 x 1	

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

Cove base and cove corner trim are suitable for non-freezing climates only.

## APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	■
Wet & Level - Interior Floor	≥ 0.42	■
Shower Floors (Residential or Light Commercial)	≥ 0.42	■
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	■
Ramps & Inclines	≥ 0.65	■
Walls/Backsplashes	N/A	■
Countertops	N/A	■
Pool Linings	N/A	■

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A1371-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [marazzitile.com/DCOF](http://marazzitile.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

## INSTALLATION

Grout Joint Recommendation	Shade Variation
<p><b>Floor Tile:</b> 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%).</p> <p><b>Mosaic:</b> 1/8"</p>	<p>Medium Variation</p>

## PERFORMANCE CHARACTERISTICS

	ASTM#	Floor & Mosaic Results
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [marazzitile.com/information/TestResults](http://marazzitile.com/information/TestResults).

## DURABILITY

### Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [marazzitile.com/Factors](http://marazzitile.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [marazzitile.com/LargeTiles](http://marazzitile.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

## FEATURES



POST-CONSUMER RECYCLED MATERIALS



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®



CERTIFIED PORCELAIN™  
50% or More Recycled Content

ZEROTOX  
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications. For more information visit [marazzitile.com](http://marazzitile.com).